



WEBB ULTRA GRIP™




Integrated ABS teeth eliminate the need for a bolt-on ABS ring.



Webb 55035PK-65 U Shape ABS Rotor	
Weight:	71 lbs.
Overall Diameter:	16.34" (415mm)
Disc Thickness:	1.69" (43mm)
Minimum Thickness:	1.46" (37mm)
Overall Depth:	5.91" (150mm)
Pilot Diameter:	8.66" (220mm)
Bolt Circle Diameter:	9.82" (240mm)
Bolt Hole (Number):	10
Bolt Hole Size:	M16 x 2.0

NEW!

Webb UltraGrip 55035PK-65 Rotor for trailer applications

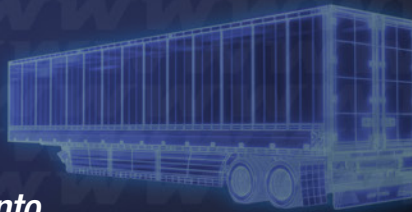

- *Cast and machined in the USA*
- *Integrated ABS teeth cast directly onto the rotor eliminate the need for a bolt-on ABS ring*
- *Optimized casting for increased airflow and superior performance*
- *"-65" part number suffix indicates the rotor has a corrosion protective coating*
- *USA sourced bolt-kit*
- *Two-week lead time!*

Part Number Cross References	
WEBB	HENDRICKSON
55035PK-65	S-38765

NOTE: "Hendrickson" is used for identification purposes only and is a registered trademark of its respective company.




www.webbwheel.com



Scan QR code to begin wheel-end training to help you cut operating costs.



Contact your local Webb Wheel Products supplier for training that can cut your operating costs!



A Marmon | Berkshire Hathaway Company

©2024 Webb Wheel Products Inc.
May 2024 • SD-158-R8